



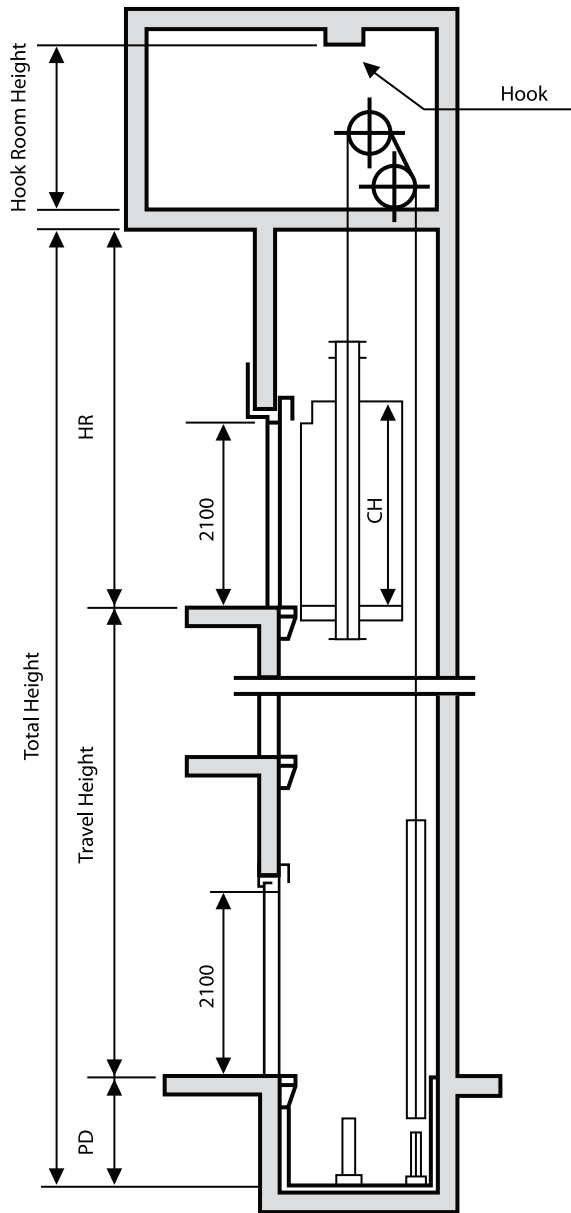

HOISTWAY SECTION (mm.)

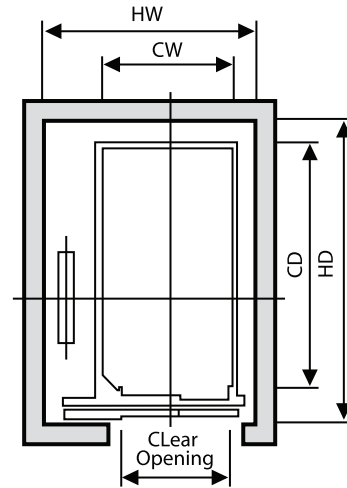

SHAFT DIMENSION

- CW : Car Width
 CD : Car Depth
 HW : Hoist way Width
 HD : Hoist way Depth
 HR : Head Room
 PD : Pit Depth
 M/C : Machine Room Height

Remark :

- Standard Entrance Height 2,100 mm.
- Counter Weight Located at Back Drop.
- Minimum Floor Height 2,500 mm.
- VVVF Inverter Control System.

Speed m/min

Specification	45	60	90	105	120	150
Max. Floor Stop	16	24	28/32*	28/32*	32	32
Max.Travel (m)	40	60	80/105*	80/105*	120	120

*Applicable when rated capacity is 750 kg and over

Elevator				Door		Car Diminsions (mm)		Hoistway (mm)		Head Room (mm)	Pit Depth (mm)
Model	Person	Capacity (kg)	Speed m/min	Type	Clear Opening	CW	CD	HW	HD	HR	PD
B11-2S	11	750	45	2S	1100	1300	2300	2050	2900	4250	1250
			60							4450	1550
			90							4650	1850
			105							4850	2150
B15-2S	15	1000	45	2S	1200	1500	2500	2300	3100	4250	1250
			60							4450	1550
			90							4650	1850
			105							4850	2150